

KR 2539-SMA Lowpass Filter

General Description


KR 2539-SMA is a 65 MHz elliptic type lowpass filter. The filter has a 65 MHz min 4 dB bandwidth and is designed for 50 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features


- 65 MHz Elliptic type lowpass
- Sharp 1.155:1 transition
- 50 Ω
- SMA Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 20 nsec/div)

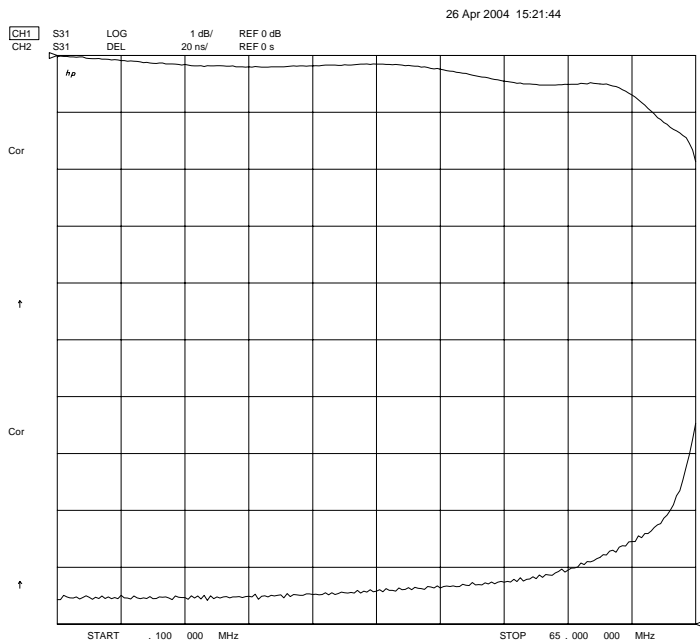

Overall Response
(10 dB/div)

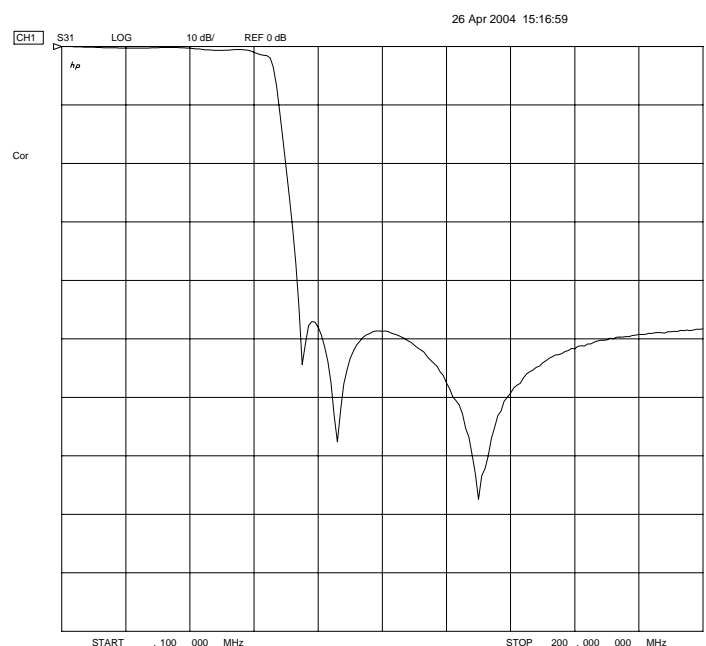

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2539-SMA

Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB
Attenuation at 65 MHz	< 4 dB (2 dB typical)
Attenuation at 75.08 MHz	> 45 dB
Source & Load	50 Ω

Physical Dimensions

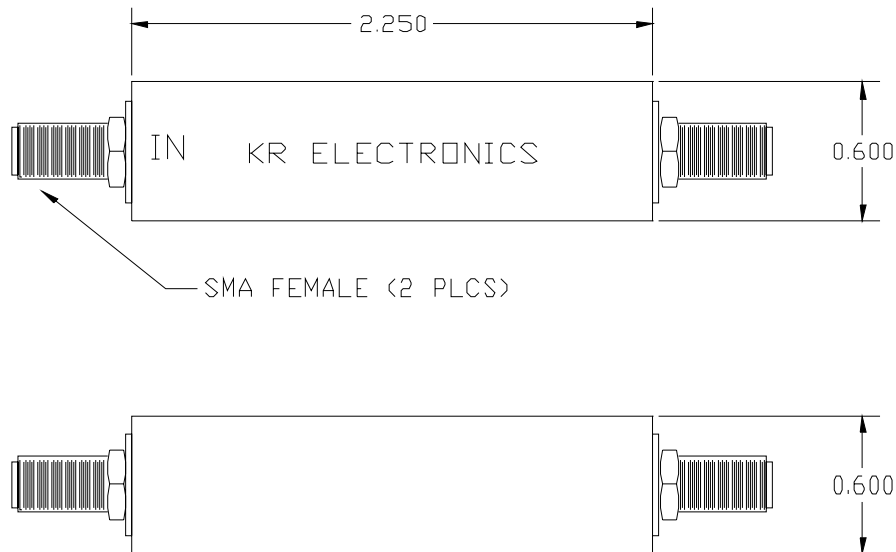

Dimensions in inches
Metal Case