

KR Electronics, Inc.

General Description


KR Electronics part number 3026 is a 650 KHz bandpass filter. The filter has a minimum 1 dB bandwidth of 60 KHz. Other center frequencies and bandwidths available. Please consult the factory.

Features

- 650 KHz Bandpass
- Minimum 1 dB Bandwidth 60 KHz
- 75 Ω Source and Load
- F-Connectors

Typical Performance

Overall Response (10 dB/div)

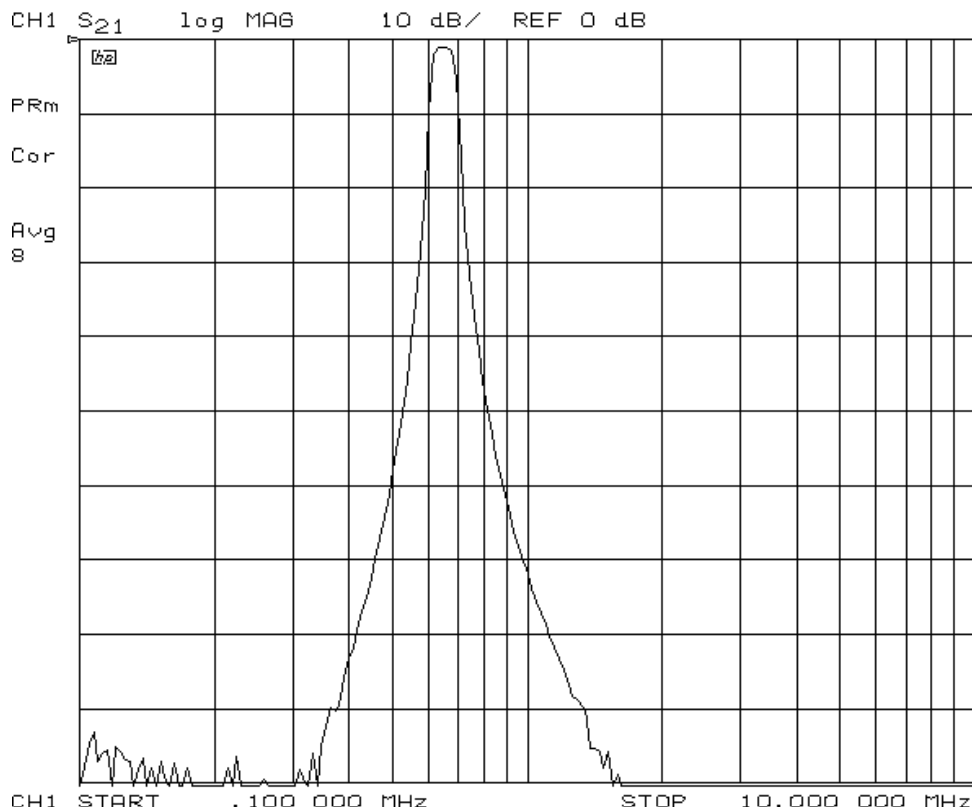


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 2 usec/div)

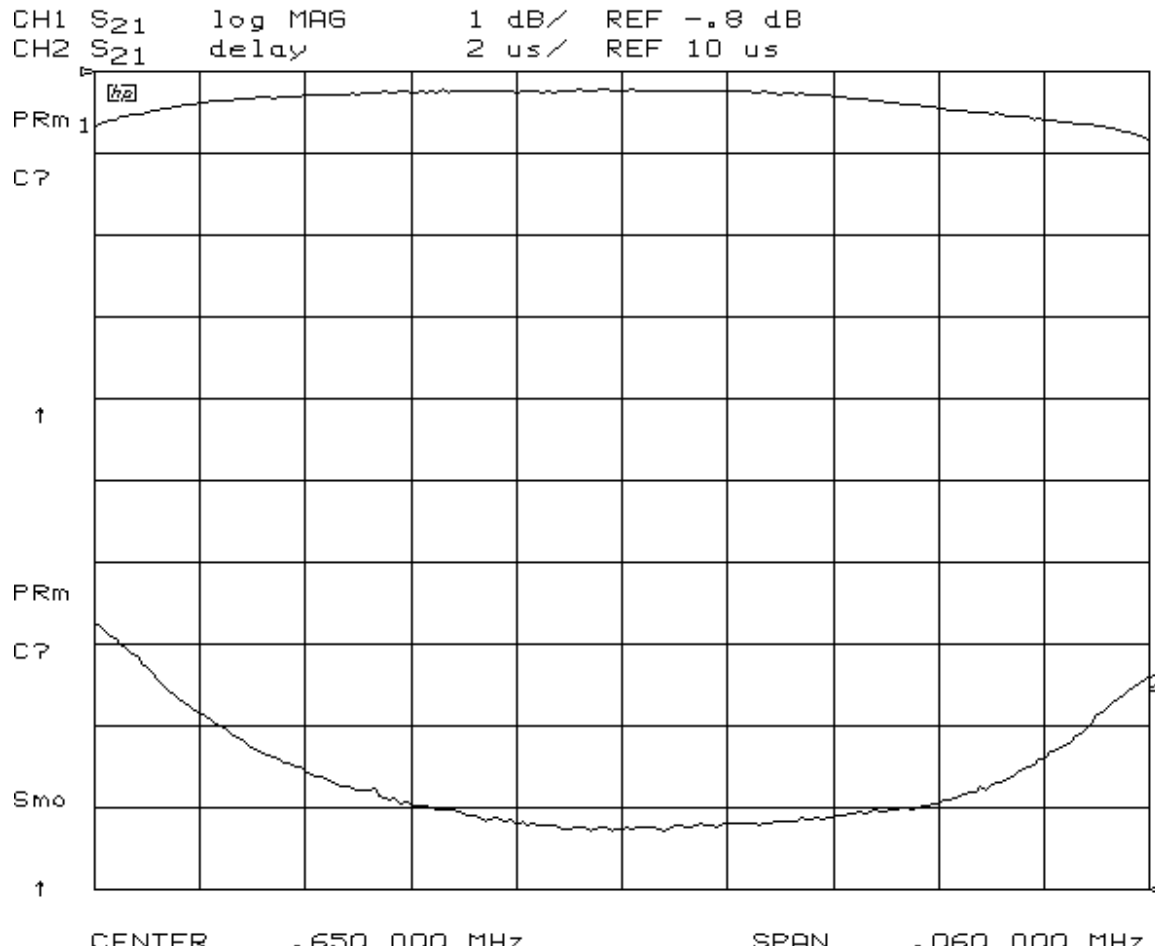


KR Electronics 3026

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	650 KHz	
Insertion Loss	3 dB max	1 dB typical
1 dB Bandwidth	60 KHz min	
3 dB Bandwidth	78 KHz typical	
6 dB Bandwidth	88 KHz typical	
10 dB Bandwidth	99 KHz typical	
20 dB Bandwidth	130 KHz typical	
40 dB Bandwidth	224 KHz typical	
60 dB Bandwidth	396 KHz typical	
Source and Load	50 Ω	

Physical Dimensions

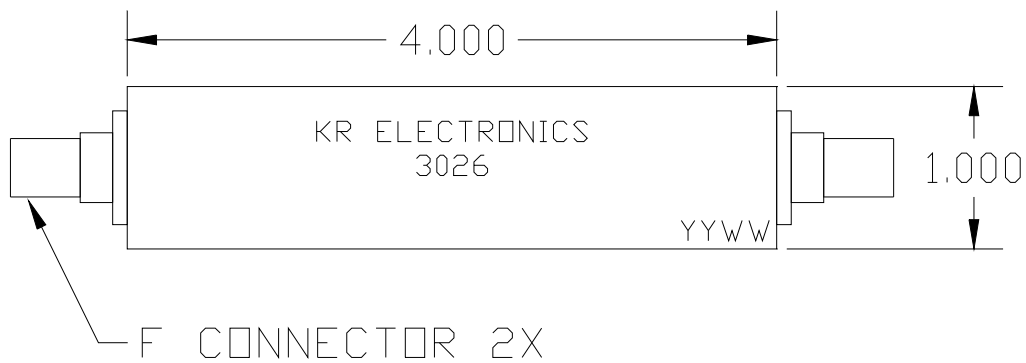

Notes:

1. Rectangular Case
2. Dimensions in inches